

# **REINFORCED SILICONE BAFFLE MATERIAL**



## **IN FIVE COLORS!**

- Black
  - Orange
  - Blue
  - Red
  - Dark Blue
- Temperature Range -65° to +550°
  - Meets Federal Spec: AMS3320
  - Available in 3" x 9' Rolls and 36" x 38" Sheets. All Material is 3/32" thick.
  - Order in Black, Orange, Blue, Red or Dark Blue

**P/N SBR-3 (+ COLOR)**

## **BAFFLE FASTENERS & WASHERS**

**AVAILABLE IN ASSORTED LENGTHS & HEAD STYLES**



**TA 212**



**TCL4-3A**




**TCSS-8**

# SEAL & CHANNEL



Small cell synthetic rubber sponge with smooth outer surfaces. Hollow.  
**TRB5022H** Black. Apply with 1100-2 Pliobond.  
 MIL-R-6130C PER FOOT OR 25 FOOT ROLL



**NEOPRENE CHANNEL**  
 3/8" wide, 1/16" wall x 1/16" slot. Flexible synthetic solid rubber. Apply with 1100-2 Pliobond. White Silicone.  
**TA-11** Fairing Seal MIL-R-6855 25 FOOT ROLL



7/32"  
 x  
 3/4"

**FAIRING & TRIM SEAL**  
 For fitting windshields, windows and fairings. High grade soft, flexible, oil resisting Neoprene rubber.  
**TA799** MIL-R-6855 SOLD BY THE FOOT



Actual size

**TRIM AND FAIRING SEAL**  
 1/32" Wall thickness, 1/2" wide. Flexible synthetic solid rubber.  
**TA8301** Trim Seal MIL-R-6855 25 FOOT ROLL



Small cell synthetic rubber sponge with smooth outer surfaces.  
**TRB5022** Black. Apply with 1100-2 Pliobond  
 MIL-R-6130C PER FOOT OR 25 FOOT ROLL

## NEOPRENE CHANNEL

For fitting windshields, windows and fairings. High grade, soft, flexible, oil resisting Neoprene rubber. SIZE: 1/4" wide, 1/16" wall, 1/8" slot, 1/2" deep  
**TA1015** Neoprene Channel SOLD BY THE FOOT  
 MIL-R-6855

## 1/16" x 1" CHAFE SEAL



An impregnated cotton cord webbing used on engine cowls overlapping airframe. Not affected by cold, heat or most solvents and chemicals. White.

**TA56**  
 MIL-C-5649B 15 Foot Roll


## COWL SEAL



Red silicon rubber engine baffle seal. No asbestos! Temperature range from -120° to +500°F.

**TSR-3** 1/8" x 3" x 9' Roll  
 22R-765 (MIL-R-5842D)

## 1/16" X 3" COWL & ENGINE BAFFLE SEAL

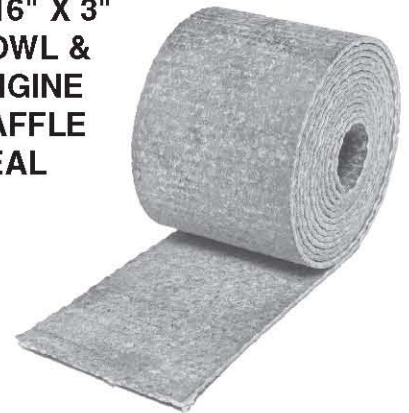

First quality woven fiberglass cloth heavily impregnated with neoprene for unsurpassed durability. -40° to 300°. Black.

**TA-8071** 1/16" x 3" x 9' Roll  
 MIL-R-6855  
**ALSO AVAILABLE IN SHEETS:**  
**TA8071** 1 Sq. Yd. and 1/2 Sq. Yd.